ThermOmegaTech®

SS WASHDOWN GUN


ADJUSTABLE SPRAY PATTERN NOZZLE

DESIGN FEATURES

- Rated at 350 PSI (24 bar)
- Maximum working temperature of 200˚F (95˚C)
- Adjustable cone spray angle from 0˚ to 60˚
- Weighs 2 lbs. (0.9 kg)
- Accepts 1/2" male NPT connections
- Positive shutoff
- SS body and handle



FLOW RATE - PRESSURE (STRAIGHT NOZZLE)

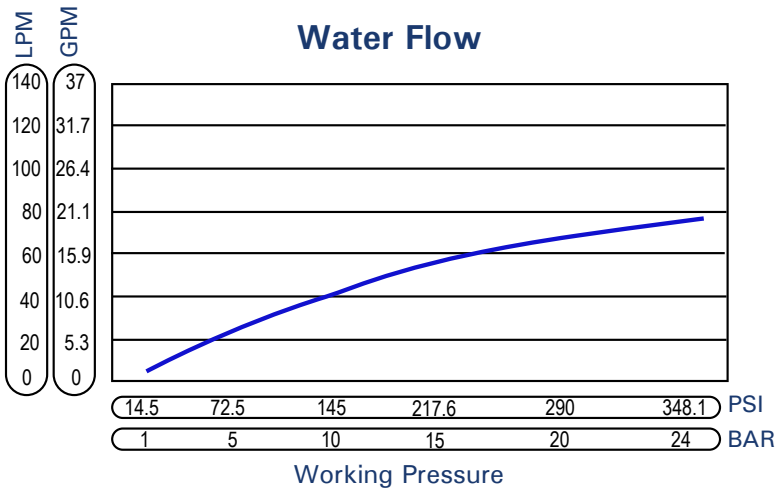

ORDERING

Part Number	Description
941-510100-000	SS Washdown Spray Gun

ThermOmegaTech®, Inc.
353 Ivyland Road
Warminster, PA 18974
1-877-379-8258
www.ThermOmegaTech.com

Because of continuous improvements, ThermOmegaTech®, Inc. reserves the right to change the design and specifications without notice