Embrace the Technology®

CircuitSolver®

A ThermOmegaTech® brand

INSTALLATION INSTRUCTIONS
THERMAL DISINFECTION DUAL BALANCING VALVE ASSEMBLIES WITH PROPRESS/PROPEX FITTINGS
CSUATD-D-PP & CSUASTD-D-PP/ CSUATD-D-PX & CSUASTD-D-PX

1) Install valve with proper flow direction as marked on valve body. This is critical with valves that have an integrated check valve.

NOTE: Upon tightening the assembly, verify that the shutoff valves are oriented so that their handles are accessible and can be operated fully without obstruction. If a reorientation after final installation is needed, loosen the **CircuitSolver®** Union Nut to rotate the section so as to not disturb the tightened components and possibly cause a leaky connection.

Scan to watch a quick tutorial video on proper reorientation instructions.

2a) **CircuitSolver® Models ending in -PP:** When using Viega ProPress® adapters, please consult the Viega ProPress Installation Manual for proper installation, tools, etc.
Visit https://www.viega.us/en/products/ProPress/Downloads.html

2b) **CircuitSolver® Models ending in -PX:** When using Uponor ProPEX® adapters, please consult the Uponor ProPEX® Installation Manual for proper installation, tools, etc.
https://www.uponor.com/en-us/products/fittings/metal-fittings/propex-lead-free-(lf)-brass-male-threaded-adapters


3) **CircuitSolver®** valves are designed to be installed at the end of each domestic hot water supply just prior to the return line. See diagram to the right.

4) For water systems with particulate/dirt problems, consider using a strainer if one is not already used upstream.

*Strainer must be maintained in order to avoid flow obstruction.

5) The CircuitSolver® valve is designed for use exclusively with fluids that are compliant with U.S. EPA National Primary and Secondary Drinking Water Regulations or the Canadian Drinking Water Quality Guidelines.


MULTI-BRANCH PARALLEL PIPING CIRCUIT:

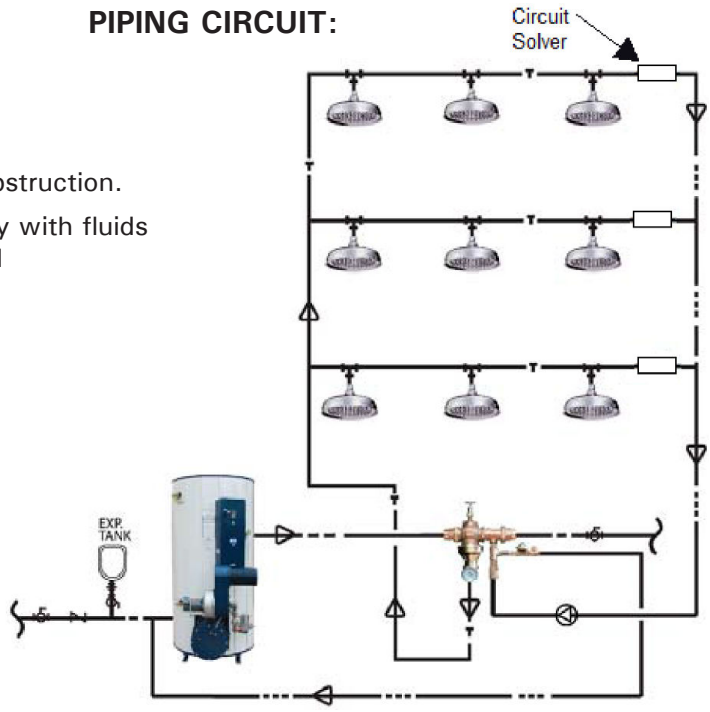


Buy American to Build America®

SCHEMATIC DIAGRAMS


CircuitSolver® Thermal Disinfection Dual Valve with ProPress Ends




CircuitSolver® Thermal Disinfection Dual Assembly with ProPress ends (CSUTAD-D-PP)



CircuitSolver® Thermal Disinfection Dual Assembly with integrated Check valve[1] and ProPress ends (CSUATD-D-PP)

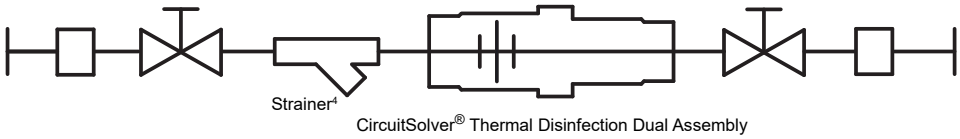


CircuitSolver® Thermal Disinfection Dual Assembly with ProPress ends (CSUASTD-D-PP)




CircuitSolver® Thermal Disinfection Dual Assembly with integrated Check valve[1] and ProPress ends (CSUASTD-D-PP)


CircuitSolver® Thermal Disinfection Dual Valve with ProPEX Ends

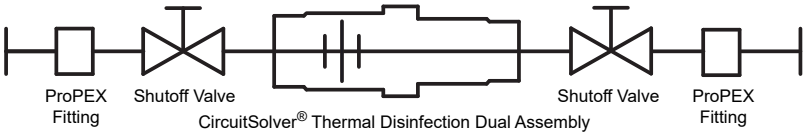


CircuitSolver® Thermal Disinfection Dual Assembly with ProPEX ends (CSUTAD-D-PX)



CircuitSolver® Thermal Disinfection Dual Assembly with integrated Check valve[1] and ProPEX ends (CSUATD-D-PX)



CircuitSolver® Thermal Disinfection Dual Assembly with ProPEX ends (CSUASTD-D-PX)



CircuitSolver® Thermal Disinfection Dual Assembly with integrated Check valve[1] and ProPEX ends (CSUASTD-D-PX)

ProPress® and Viega® are registered trademarks of Viega and ProPEX® and Uponor® are registered trademarks of Uponor

Proper Use: Use ThermOmegaTech® products only as specified to ensure performance, safety, and regulatory compliance.
No Modifications: Do not modify ThermOmegaTech® products, as changes may void warranties and violate regulations (e.g., RoHS, REACH).
Proper Disposal: Dispose of end-of-life products per local hazardous substance regulations; contact ThermOmegaTech® or recycling facilities for guidance.

⚠ WARNING: This product can expose you to chemicals, for example lead, nickel, acrylonitrile, which are known to the State of CA to cause cancer, birth defects, or reproductive harm. For more information, go to www.P65Warnings.ca.gov

Warranty information disclosed at www.thermomegatech.com/terms-conditions/

CSUATD-PP & CSUASTD-PP/
CSUATD-PX & CSUASTD-PX_IMI
REV: 9/26/2025