ThermOmegaTech®

Installation Checklist
Therm-O-Mix®

Customer Name:	Installation Location:
Contact Number:	Unit Identifier:
Project Name and Location:	
Customer PO Number:	Serial Number(ThermOmegaTech Internal Use Only):

Highlighted Areas Must be Completed For PO to be Accepted

Please Initial to Agree to the Below Installation Requirements

Steam Supply Pressure must be: Standard: 45-60 PSI or Low Pressure: 15-30 PSI	
For Steam Pressure Greater Than 75 PSI, Relief Valve and Steam Regulator are Required	
Water Hammer Arrester to be Installed Within 10ft. of Emergency Shower	
Drain Line To Air Gap	
Drain Line 1" Minimum	
Drain Line Unrestricted	
Water Supply Pressure must be 55 PSIG - 90 PSIG	


Operating Therm-O-Mix® outside of the above conditions can cause potentially hazardous conditions and failures may not be covered by warranty.

Please sign below as acceptance of these terms, conditions and installation requirements.
Return via email to **valves@thermomegatech.com** to authorize production.

Print Name: _____

Signature: _____

Title & Company: _____ Date: _____

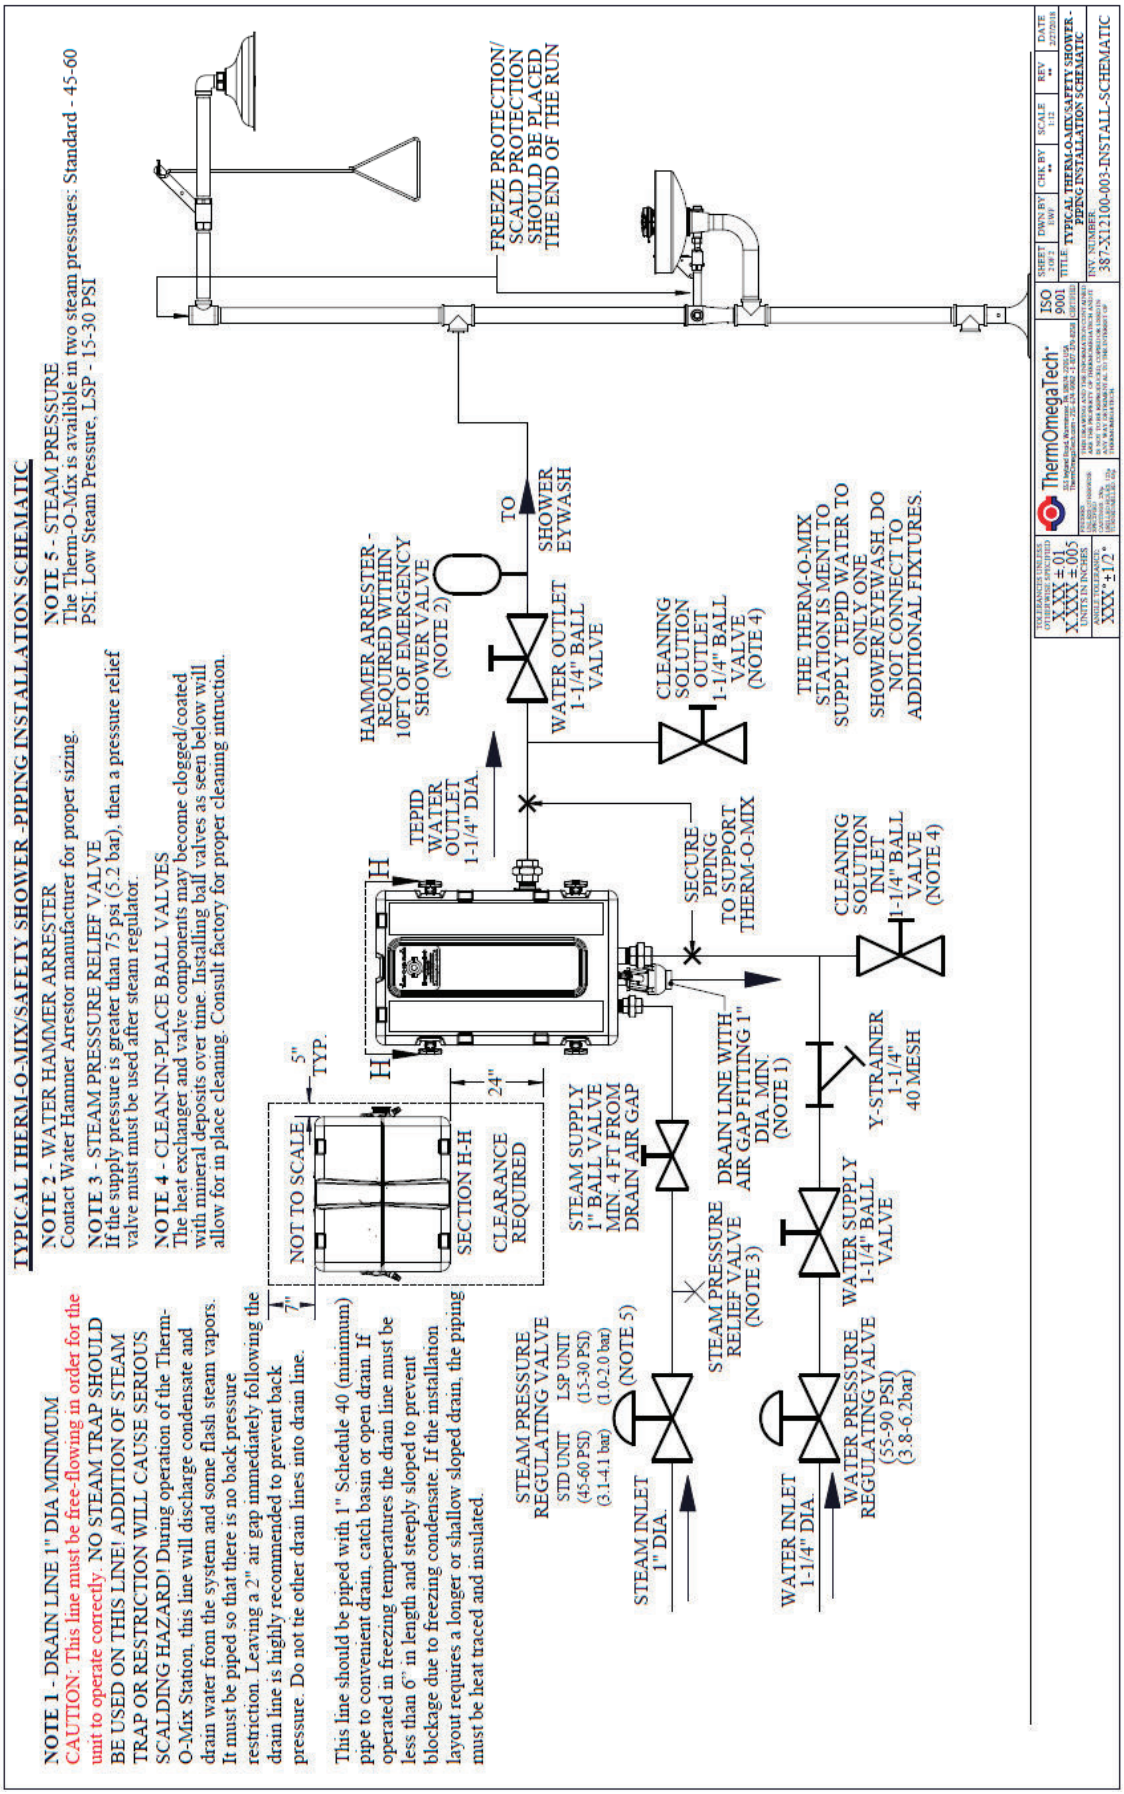

Therm-Omega-Tech®, Inc.
353 Ivyland Road
Warminster, PA 18974
1-877-379-8258
www.ThermOmegaTech.com

Because of continuous improvements, Therm-Omega-Tech®, Inc. reserves the right to change the design and specifications without notice